

Fill-Air® Flow

Inflatable Packaging System

Accessible
Efficiency
with Air




4 FEATURE SYSTEM OPERATION

ON/OFF CONTROL SENSOR: Swipe hand over sensor repeatedly for amount of bags needed. (1 swipe = 1 bag; 2 swipes = 2 bags).

100 BAG BATCH FEATURE: Hold hand over sensor for 3 seconds—system counts and inflates 100 bags.

FILL AMOUNT BUTTON: Touch for high or low from bag to bag inflation.

TETHER AUTO REPLENISHMENT: Produces up to 1 metre of bags when extended into position.

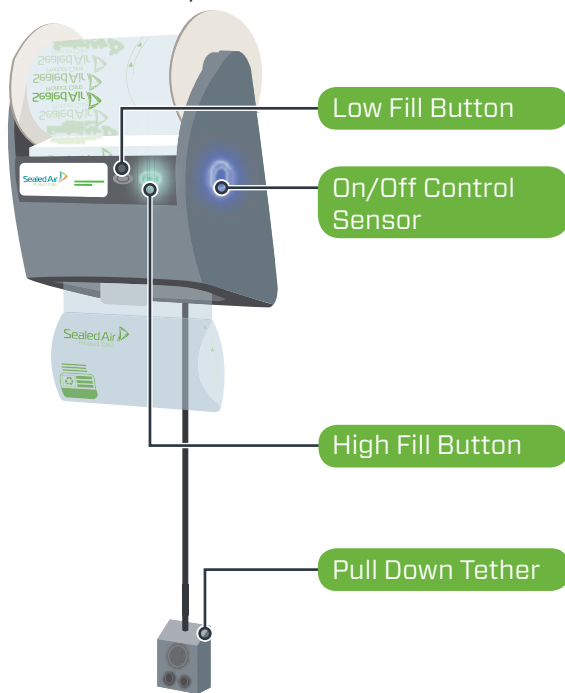

Harnessing the incredible power of air

At Sealed Air, we've harnessed the incredible power of air to help our customers grow their business. Our products level the playing field so that all businesses can deliver a superior customer experience, speed of throughput, reduced freight costs, while increasing the company's image and profile.

BENEFITS OF USING FILL-AIR® FLOW

Easy To Use

- Swipe hand over sensor repeatedly for amount of bags needed or adjust tether for auto replenishment

Space Savings

- Wall Mount or Optional Table Top Clamp Stand

SPECIFICATIONS

Overall Size (L x W x H)
360 x 200 x 330mm

Film Roll

- 101m per roll of 250 x 200mm uninflated bags.
- 500 30 micron LDPE bags per roll
- Bags can be re-inflated by a one-way valve

Bags per min

Low inflation - 20 bags per minute
High inflation - 11 bags per minute

Base Unit

- Inflation unit
- Wall Mounting Plate
- Tether Switch
- Universal Power Adapters Plugs
- User Guide

Available Accessories
Table Top Clamp Stand

Warranty
1 Year



Sealed Air
Telford Way
Kettering NN16 8UN
United Kingdom

T: +44 1536 315700
E: info-pack@sealedair.com
www.sealedair.com/product-care

@SealedAirPack @SealedAirPack